


FEATURES:

- Input: AC 100-120V or 200-240V~ 50/60Hz
- Electrical Type: Isolated Power Supply, Class II
- Power: 25-42 Watts
- Ovp, ocp, scp and Over load protection
- Stroboscopic coefficient <1%.
- Efficiency level: VI, standby power<0.5W
- Dimension: 115*43*30.0mm
- Application: Lighting field: indoor office lighting, decorative lighting, business lighting, home lighting.

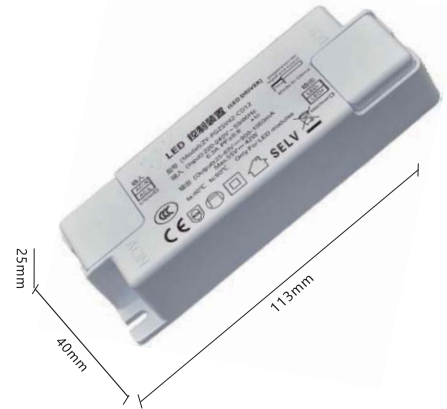

UL94-V0阻燃塑壳
 UL94-V0 Flame Resistant PC Shell
单电压★低PFC
 Narrow Voltage★High PFC
抗雷击★过认证
 Surge500V★Match Certificates

SAFETY:

SAFETY:	
Safety Standard	UL 61347, IEC 61347, EN 61347-1:2015
Safety Approval	UL/cUL, CE, FCC, UKCA, PSE, CB, SAA, KC, TUV
EMC Standard	EMC EMISSION: EN55015 class B (CISPR32), EN61000-3-2,-3, EAC TP TC 020 EMC IMMUNITY: EN61000-4-2,3,4,5,6,8,11, EN61547; light industry level, criteria A, EAC TP TC 020
MTBF	50K hrs min. MIL-HDBK-217F (25°C)

MODEL LIST:

产品型号 (Model)	输出功率 (W)	输入电压 (AC·V)	输出电压 (DC·V)	输出电流 (mA)	输出效率 (EFF)	功率因数 (PFC)	尺寸 (L*W*H)	认证 (CERT)
ZY-PGZV40-ZA12	25-42W	220-240	25-40	500-1050	89% (230Vac)	0.9 (230Vac)	115*43*30	CE/CB/TUV SAA/CCC
ZY-PGZV40-ZA18	25-40W	220-240	42-60	250-660	89% (230Vac)	0.9 (230Vac)	115*43*30	CE/CB/TUV SAA/CCC
ZY-PGZV40-ZA24	25-42W	220-240	42-80	250-525	89% (230Vac)	0.9 (230Vac)	115*43*30	CE/CB/TUV SAA/CCC
ZY-PGZV40-ZB12	25-42W	220-240	25-40	500-1050	89% (230Vac)	0.9 (230Vac)	113*40*25	符合认证
ZY-PGZV40-ZB18	25-40W	220-240	42-60	250-660	89% (230Vac)	0.9 (230Vac)	113*40*25	符合认证
ZY-PGZV40-ZB24	25-42W	220-240	42-80	250-525	89% (230Vac)	0.9 (230Vac)	113*40*25	符合认证

Mechanical Diagram: