

FEATURES:

- Input: AC 100-240V~ 50/60Hz
- Available plug: US, EU plug
- Port: TYPE C + TYPE C port
- Ovp, Ocp, Scp and Over load protection
- GAN TECH, 65W PD Charger, smart
- Efficiency level: VI
- Dimension: 58.2*57.5*29.2mm(exclude plug)
- Application: Tablet, Mobile phone, etc...




SAFETY:

SAFETY:	
Safety Standard	UL 62368, IEC 62368, EN 61558, IEC60601, IEC60335, IEC60065
Safety Approval	UL/cUL, CE, FCC, UKCA, PSE, CB, SAA, KC, TUV
EMC Standard	EMC EMISSION: EN55032 class B (CISPR32), EN61000-3-2, -3, EAC TP TC 020 EMC IMMUNITY: EN61000-4-2, 3, 4, 5, 6, 8, 11, EN55024; light industry level, criteria A, EAC TP TC 020
MTBF	50K hrs min. MIL-HDBK-217F (25°C)

MODEL LIST:

MODEL	USB PORT	OUTPUT	Single Port POWER	TOTAL POWER
Qc83	USB C PORT 1	PD: 5V3A, 9V3A, 12V3A, 15V3A, 20V3.25A	65W	65W
	USB C PORT 2	PD: 5V3A, 9V3A, 12V3A, 15V3A, 20V3.25A	65W	
	USB A PORT 3	PD: 5V3A, 9V3A, 15V3A, 20V3A	60W	

Mechanical Diagram:

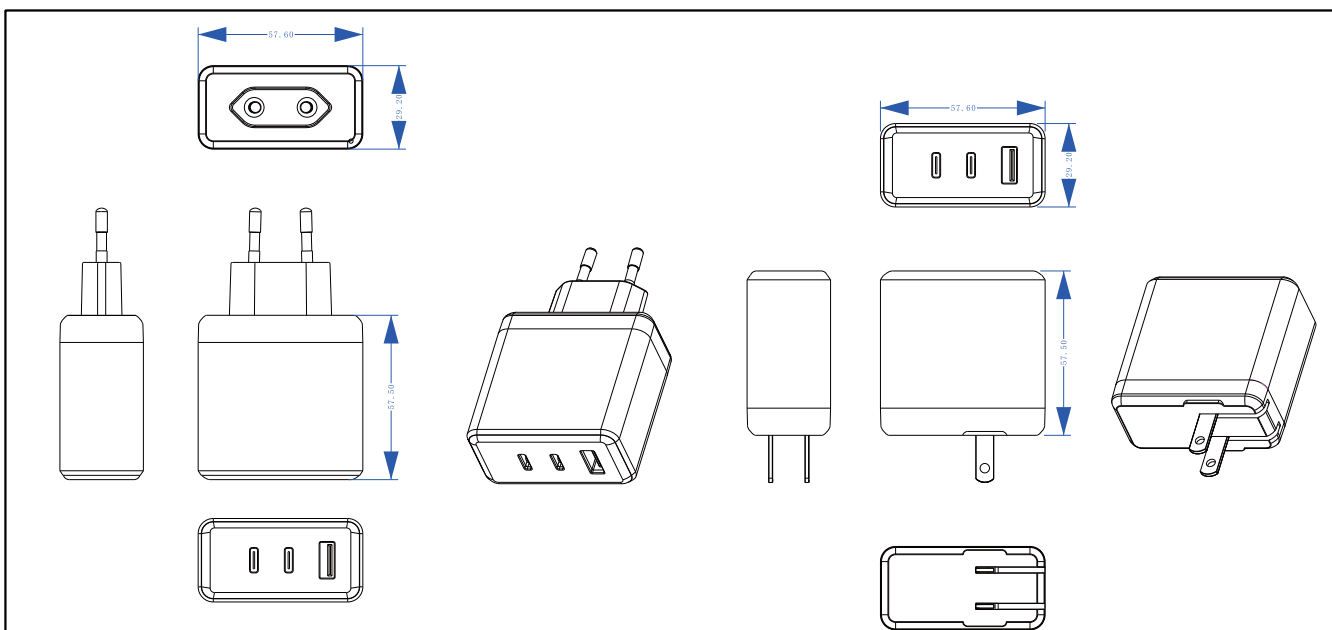

公差标注公差的尺寸，以括号公差为准				
尺寸范围	公差尺寸			
L≤4	±0.05	±0.08	±0.1	±0.2
4 < L ≤ 20	±0.08	±0.1	±0.2	±0.3
20 < L ≤ 50	±0.1	±0.15	±0.3	±0.4
50 < L ≤ 200	±0.15	±0.25	±0.4	±0.6
200 < L	±0.2	±0.4	±0.5	±0.8

STARWELL TECH CO LTD					版本	1.0
文件编号		制图		单位	mm	
图纸名称	DK100T-CN外观	审核		比例	1:1	
物料编号		批准		日期	2022.10.20	
版本	变更内容	变更原因	变更日期			